

ASFAT SEYİT ONBAŞI

BOMB LOADER VEHICLE 3



www.asfat.com.tr

SEYİT ONBAŞI

DIMENSIONS

Lenght: 3.850 mm | **Width:** 1.250 mm | **Height:** 1.070 mm | **Weight:** 1.800 kg

LIFTING CAPACITY


On the Plate: 1.360 kg (3000 lbs.)
On the Prong(Fork): 1.020 kg (2250 lbs.)

LOADING PERFORMANCE

Minimum Distance, Platform to Ground: 15,8 cm (6,25")
Maximum Distance, Platform to Ground: 198 cm (78")
Minimum Distance, Fork to Ground: 2,5 cm (1")
Maximum Distance, Fork to Ground: 184 cm (72,5")

VEHICLE MOBILITY

Maximum Speed, Loaded: 16 km/h (10 mph)
Breaking Distance, Loaded: 4.88 m (16 ft)
Level of Gradeability, Loaded: 10%
Level of Gradeability, Unloaded: 20%
Transmission System: Hydraulic

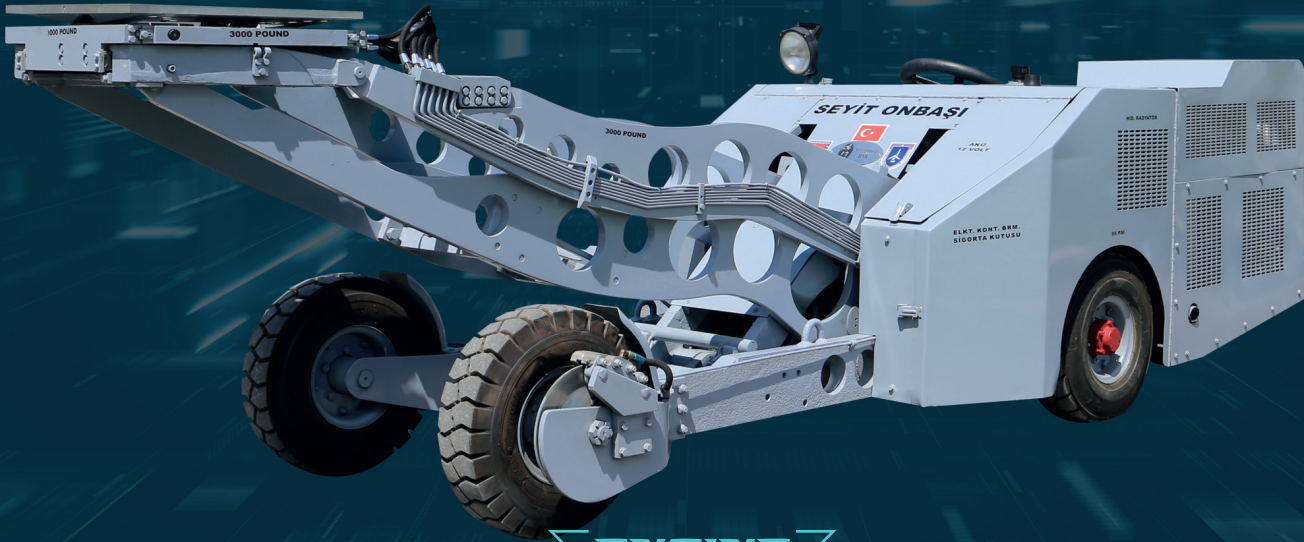

ENGINE

Model No: 9LD625-2 | **Power:** 28 HP | **Number of Cylinder(s):** 2
Cooling System: Air Cooled | **Fuel Type:** Diesel
Noise Level: 84 db (A) Maximum(Unloaded 7m 1500RPM)

STEERING SYSTEM AND WHEELS

Steering System: Hydraulic
Wheel Track (Tread): Rear 107 cm Front 73 cm | **Tires:** 5.00-8,8 Plies Pneumatics Rubber Tire
Diameter of Steering Wheel: 35 cm
Turning Radius: 3,3 m